



Model 1000 / Series Four

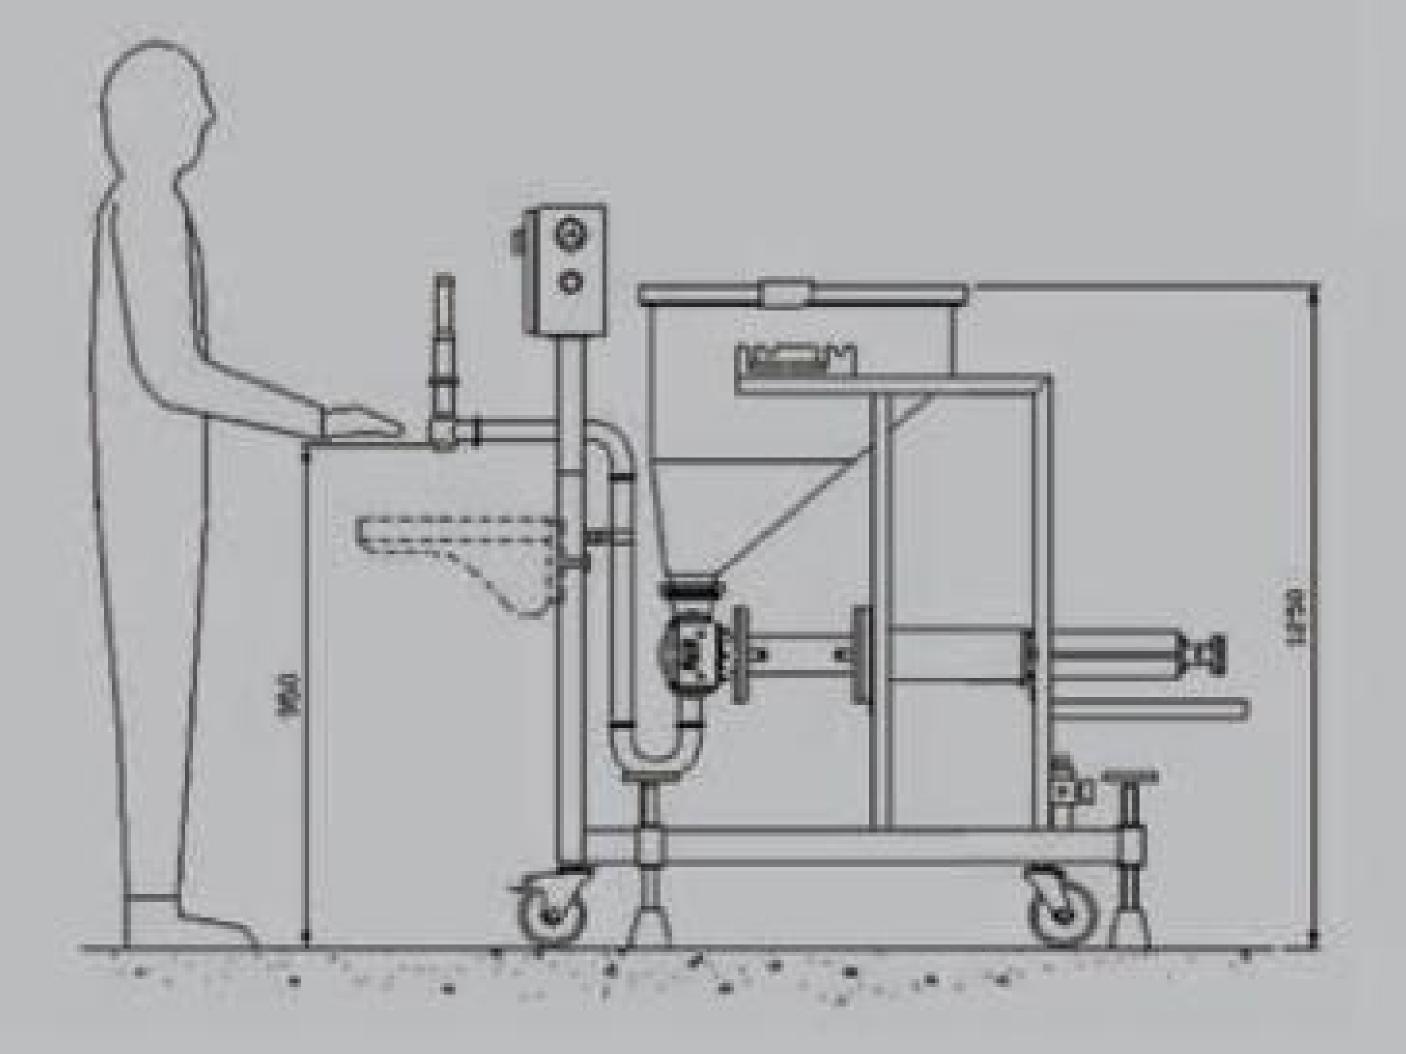

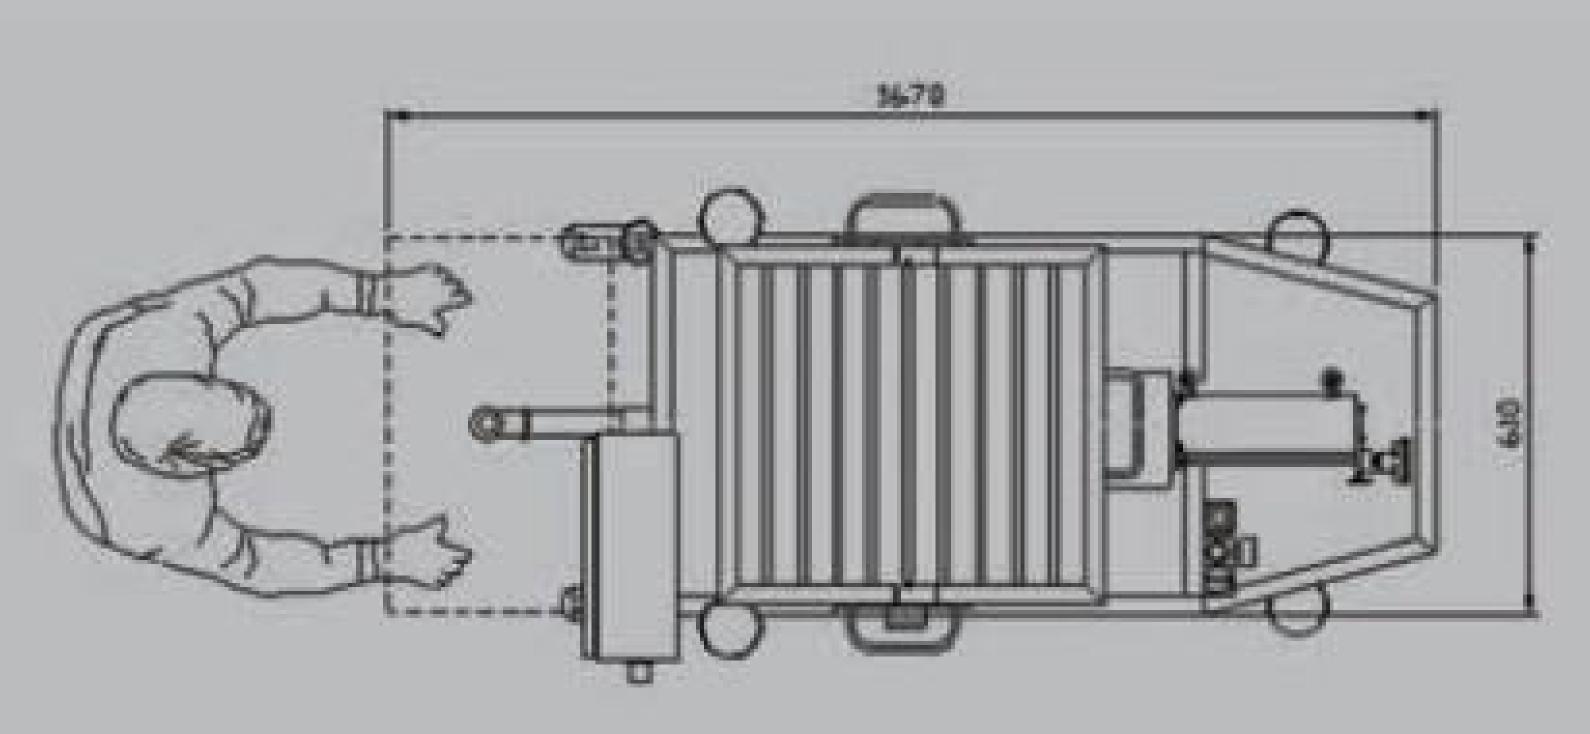

Suitable applications typically include

- Jam, Preserves & Honey
- Condiments & Sauces
- Pate, Dips & Spreads
- Coleslaw & Pasta Salads
- Sandwich & Pie Fillings
- Soup & Ready Meals
- Cakes, Puddings & Desserts
- Dairy Goods
- Seafood Products
- Non-Food Industry

Piston Pump Barrel Options

STANDARD FILL	
PUMP BORE	DEPOSIT RANGE
Ø38 x 160mm	10ml - 170ml (1.5°)
Ø58 x 160mm	25ml - 400ml (2.285")
Ø71 x 160mm	50ml - 600ml (2.8")
Ø101 x 160mm	125ml - 1200ml (4.0")

MAXI FILL		
PUMP BORE	DEPOSIT RANGE	
Ø130 x 205mm	200ml - 2500ml (5.125")	
Ø130 x 250mm	200ml - 3300ml (5.125°S)	
Ø165 x 250mm	500ml - 5000ml (8.5")	

Semi-Automatic

This requires an operator to position an empty container underneath the depositing nozzle of the filling machine.

The machine start and product deposit cycle is initiated by means of pressing a push button or foot pedal. At the end of the deposit cycle, the filled container is manually removed from the fill position by the operator.

Semi-automatic filling machines can be easily converted to fully automatic and operate in conjunction with a conveyor if production levels increase at a later date.

Fully Automatic

An empty container is automatically presented underneath the depositing nozzle via a conveyor. The filling machine, which can be a single or multi-head configuration, then accepts an external signal from the conveyor to start an automatic depositing cycle. At the end of this cycle, the filled container is automatically removed from the fill position.

